



CT型 (2段・湿式真空ブロワ)



性能表

型 式	口 径 (吸込×吐出)	回転速度	吸込状態空気量(m³/min)および所要動力(kW)										封水量 Q /min
			－50kPa (－375mmHg) (－5100mmAq)		－60kPa (－450mmHg) (－6120mmAq)		－70kPa (－525mmHg) (－7140mmAq)		－80kPa (－600mmHg) (－8160mmAq)		－90kPa (－675mmHg) (－9180mmAq)		
		min ⁻¹	m³/min	kW	m³/min	kW	m³/min	kW	m³/min	kW	m³/min	kW	
CT100	100A×65A	1400	5.83	8.2	5.62	8.9	5.42	9.5	5.22	10.3	3.97	11.7	8
		1600	6.95	9.4	6.74	10.2	6.54	11.0	6.34	11.8	5.09	13.5	
		1800	8.07	10.5	7.86	11.4	7.66	12.3	7.46	13.3	6.21	15.1	
		2000	9.19	11.9	8.98	12.8	8.78	13.7	8.58	14.9	7.33	16.9	
CT125	125A×80A	1100	10.6	12.9	10.3	14.2	9.74	15.6	8.66	17.0	4.52	19.3	10
		1300	13.0	15.2	12.7	16.7	12.2	18.4	11.1	20.1	6.94	22.9	
		1500	15.4	17.6	15.1	19.3	14.6	21.2	13.5	23.1	9.36	26.3	
		1750	18.4	20.5	18.1	22.5	17.6	24.7	16.5	27.0	12.4	30.8	
CT150V	150A×125A	1000	17.2	22.6	16.8	23.8	16.7	24.9	16.6	26.1	13.7	27.4	10
		1200	21.7	27.1	21.3	28.5	21.2	29.9	21.1	31.3	17.9	32.9	
		1400	26.2	31.6	25.8	33.3	25.7	34.8	25.6	36.5	22.0	38.4	
		1600	30.6	36.1	30.2	38.0	30.1	39.8	30.0	41.7	26.1	43.8	
		1800	35.1	40.6	34.7	42.8	34.6	44.8	34.5	46.9	30.2	49.3	
CT200	200A×125A	1000	33.7	43.3	32.3	45.9	29.6	48.7	25.0	53.1	12.2	57.6	20
		1200	42.0	51.9	40.6	55.1	37.9	58.5	33.3	63.7	23.6	69.1	
		1350	48.2	58.4	46.8	62.0	44.1	65.8	39.5	71.6	29.9	77.7	
		1500	54.5	64.9	53.1	68.9	50.4	73.1	45.8	79.6	36.2	86.4	
		1600	58.6	69.2	57.2	73.5	54.5	78.0	49.9	84.9	40.3	92.1	
CT200A	200A×150A	1000	39.0	48.7	36.8	51.8	33.5	55.0	29.0	59.9	13.6	65.6	20
		1200	48.5	58.5	46.3	62.2	43.0	66.0	38.5	71.9	21.0	78.7	
		1350	55.6	65.8	53.4	69.9	50.1	74.3	45.6	80.9	28.1	88.6	
		1500	62.7	73.1	60.5	77.7	57.2	82.5	52.7	89.9	35.2	98.2	

外形寸法図

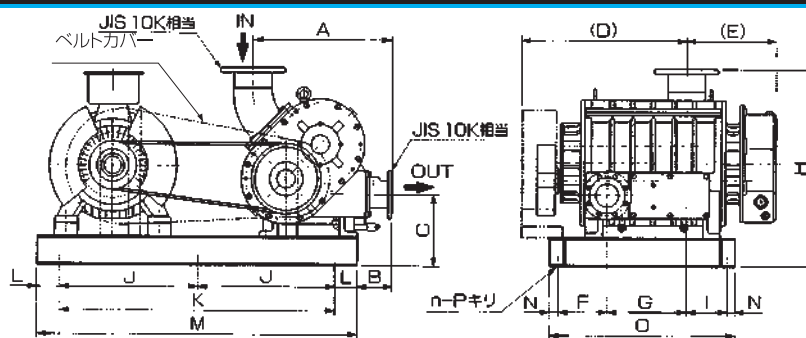

単位 (mm)

型 式	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	n	P	概略質量 (kg)
CT100	416	127	250	500	320	145	215	600	170		650	100	850	35	600	4	16	275
CT125	526	120	275	592	342	164	268	727	268		1000	125	1250	35	770	4	16	480
CT150V	639	177	310	719	395	214	345	826	181	600	1200	100	1400	35	810	6	16	687
CT200	788	190	360	850	495	240	370	1051	270	750	1500	100	1700	35	950	6	19	1328
CT200A	798	200	360	925	520	270	415	1051	195	750	1500	100	1700	35	950	6	19	1350

※質量はモータを除いた標準付属品付きの値です。 ◎標準付属品—ベース、ベルトカバー、Vプーリ、Vベルト、基礎ボルト